

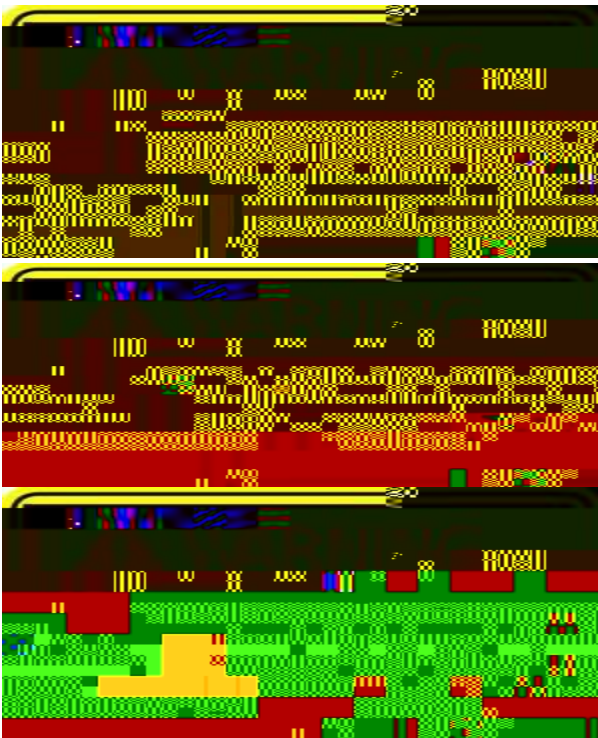
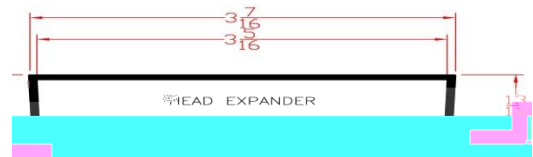
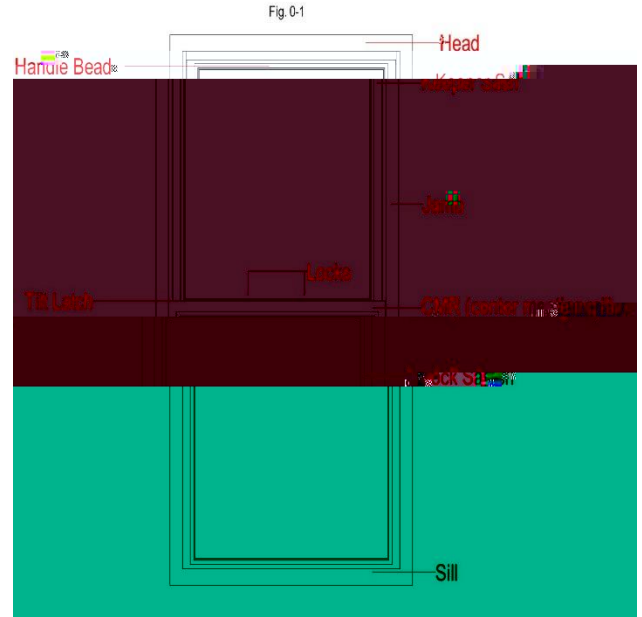


(Not Provided by Manufacturer)

- Tape Measure
- Utility Knife
- Drill
- Caulk Gun
- Level
- Hammer
- Putty Knife
- Safety Glasses
- Pry bar
- Small/Large Flat head screw driver
- Square
- Wood (to be used as exterior stops)
- Foam Gun (Optional)

(Not Provided by Manufacturer)

- Sealant
- Low expanding foam/Loose insulation
- Drop Cloth
- Non bio degradable shims
- Backer Rod

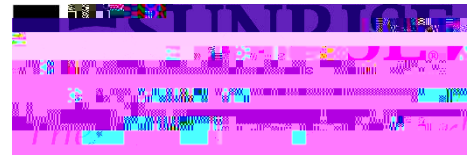

Before beginning the installation, check window measurements of both the window opening and the new replacement window to make sure that the proper size was ordered and manufactured for that opening. Make note of any surfaces that may need to be repaired prior to the installation of the replacement window.

Any household items that are blocking the window or that could potentially become damaged during the project should be removed. Items hanging from the wall or sitting loose on shelves may need to be removed.

Protective coverings such as drop cloths or plastic sheeting should be used to cover the floor and furnishings at and near the work area.

(use figure 2-1)

Remove the exterior stops. These stops may be re-used if not damaged.

Pull the top sash down and cut the pulley cord to remove the sash.

Cut the bottom pulley cords.

Score and remove the parting stops that sit between the bottom lock-sash channel and the top keeper-sash channel. These will not be reused.

Remove the bottom sash

Remove the pulley system at the top left and right of the jambs. The weight pocket cavity left by the pulley system should be insulated.

Fig. 2-1



Clean all debris from the opening.

Any rotted or damaged materials in the opening must be replaced or repaired.

Check the opening for sill crowning/bow. Level sill using shims. Check the opening for plumb and square.

Remove packaging from the replacement window, making sure not to cut or damage the window or screen.


Remove the screen from the window frame and set aside for re-installation later.

Perform a dry fit to make sure that your new replacement window will fit properly and that there is adequate room for any adjustments that may be needed due to the opening being out of square, level or plumb.

At this time check to see if a head expander will be necessary.

(use figure 4-1)

Insert the replacement window into the opening bottom first, tilting the top back and then inwards making sure that the window is evenly seated in the sealant on the interior stops.

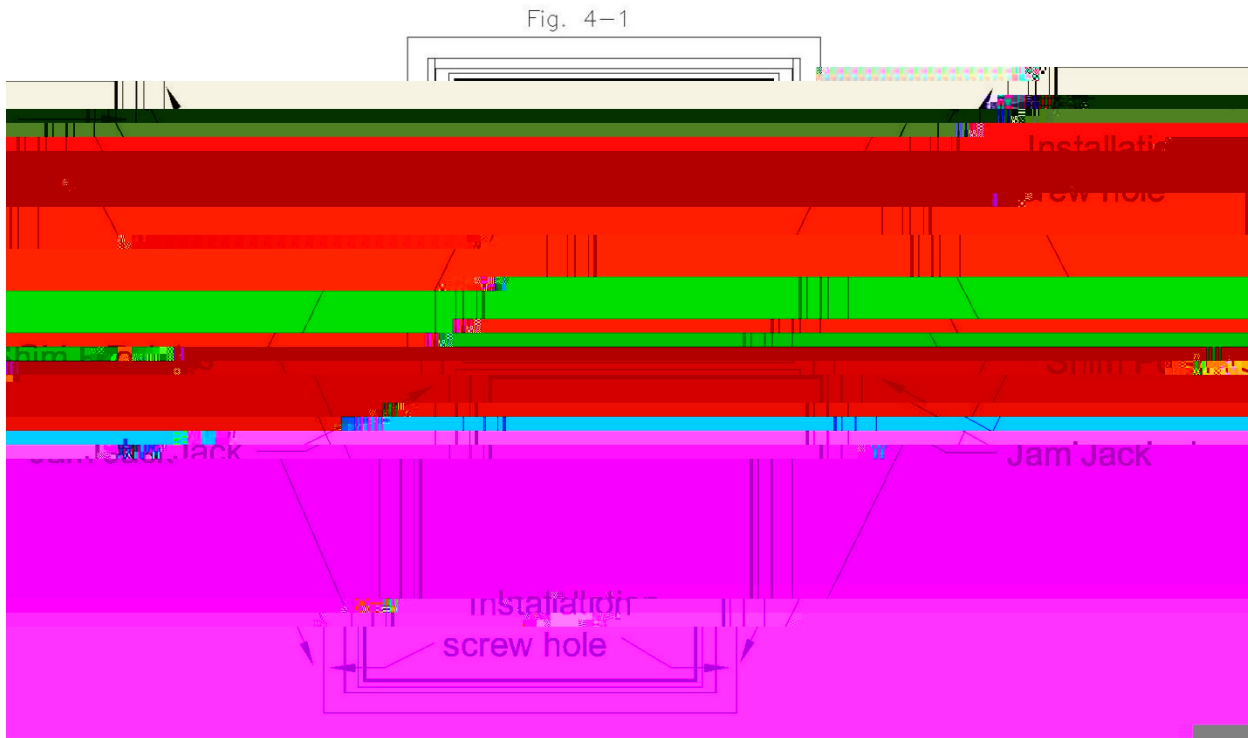

Shims must be applied at all screw points making sure not to twist, bow, or distort the replacement window frame. Shim at jamb jacks if needed.

Check the window for square, level and plumb. Adjust shims and jamb jacks accordingly.

The window must be secured using the provided installation screws in the pre-drilled screw holes leaving all screws loose to allow adjustments.

Check the window for square after tightening each installation screw. Screws should be flush with interior pocket wall at the top and far enough in at the bottom points to allow the cap cover to be installed.

Gaps around the perimeter of the windows should have a layer of low expansion spray foam added (refer to the spray foam manufactures instruction on the use of their product) or fiberglass insulation may be used. Insulation must not twist, bow, or distort the replacement window frame.

If a sill angle is needed, it should be applied to the new replacement window at this point. Measure and cut the sill angle to the proper height and snap into the exterior sill snap groove.

A bead of sealant must be placed around the exterior perimeter of the window. Any gaps larger than 3/8" will need to be filled using backer rod before a sealant is placed around the interior perimeter of the window. (figure 5-1)

Two 3/8" gaps may be left in the sealant where the sill angle meets the previously existing sill, and the sill may be left uninsulated, if a "Drainage System" is desired (per ASTM E2112).

New exterior stop or the previously removed exterior stops must be reinstalled.

If no exterior capping is being applied, inspect the joint between the new replacement window and exterior stops for any gaps. If needed sealant may be applied around the exterior where the stops meet the new replacement window.

If capping the exterior trim, sealant should be applied where the capping meets the new replacement window